




F / G. 4

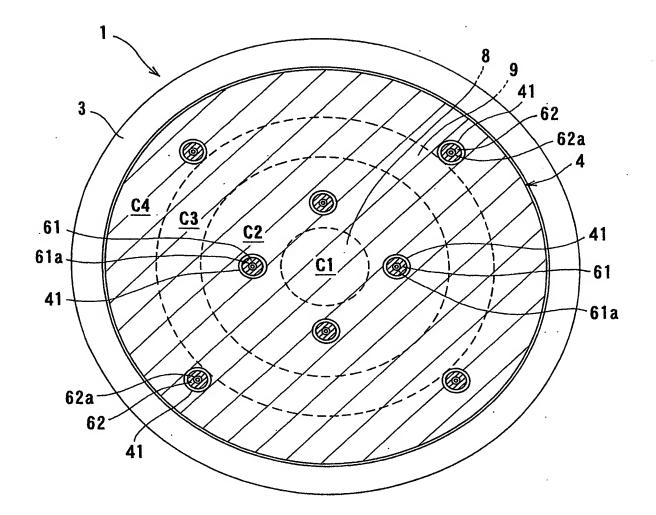

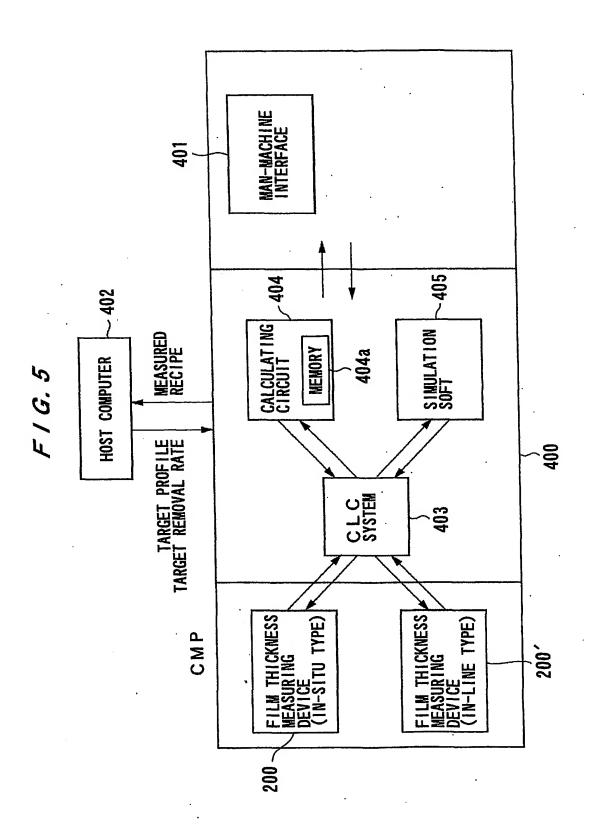


6/23

F / G. 6

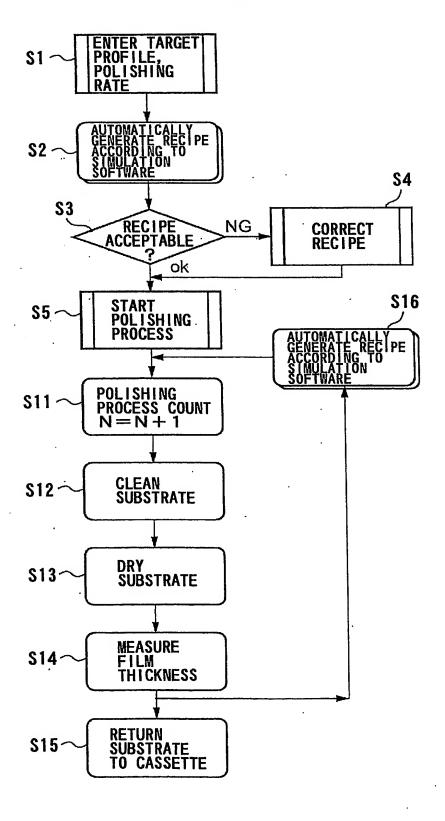

7/23


F 1 G. 7

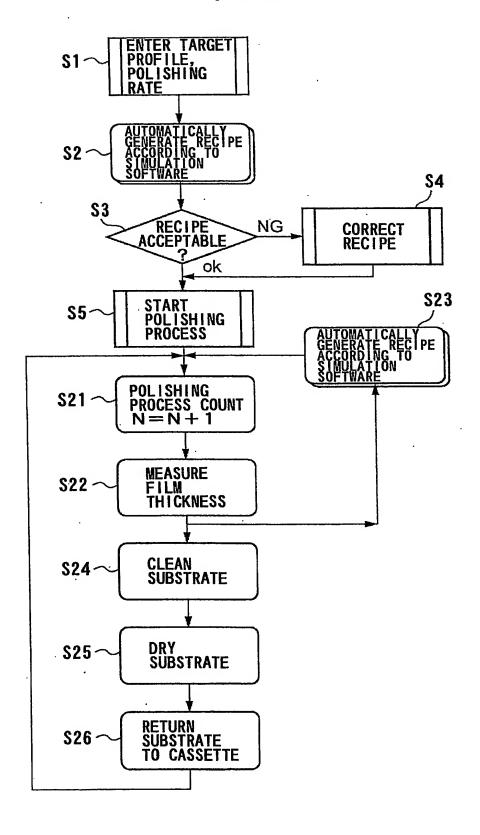


WO 2004/113020 PCT/JP2004/008855

8/23


F / G. 8

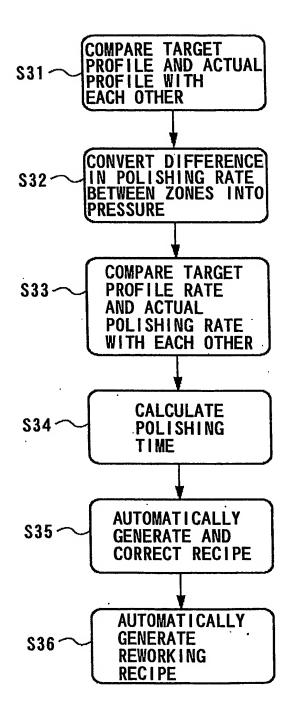


F/G.9

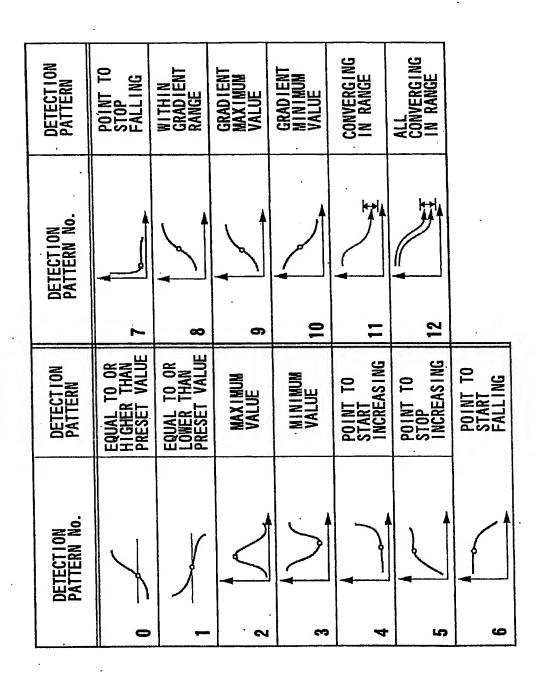


F I G. 1 0 A

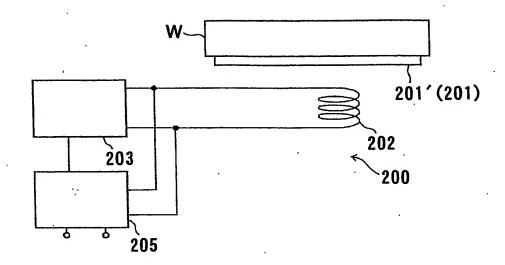


F / G. 10B

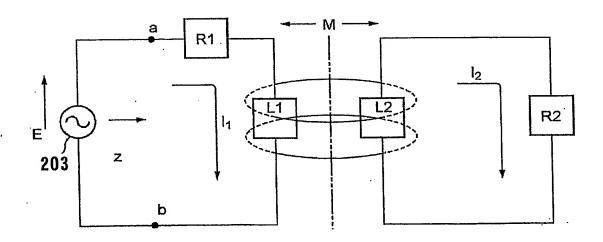

F / G. 11

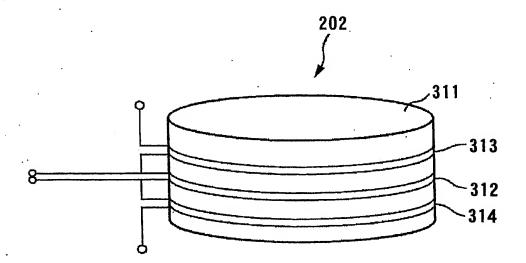


F I G. 12A

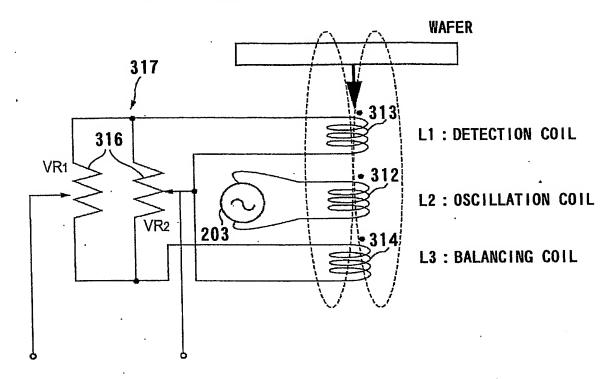


F / G. 12B


F I G. 12C

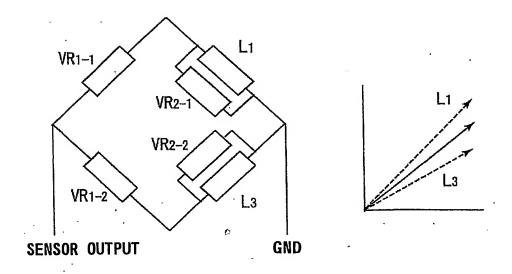


R OUTPUT tan¹R/X VR2+X2 308 307 **90**8 305 . 06 304 303 _202

F I G. 14

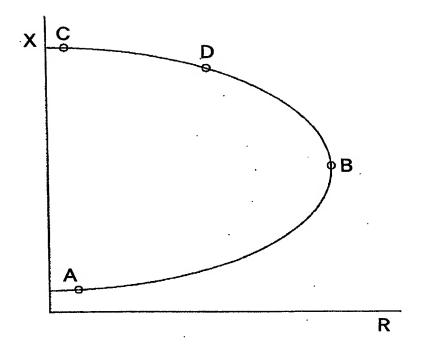


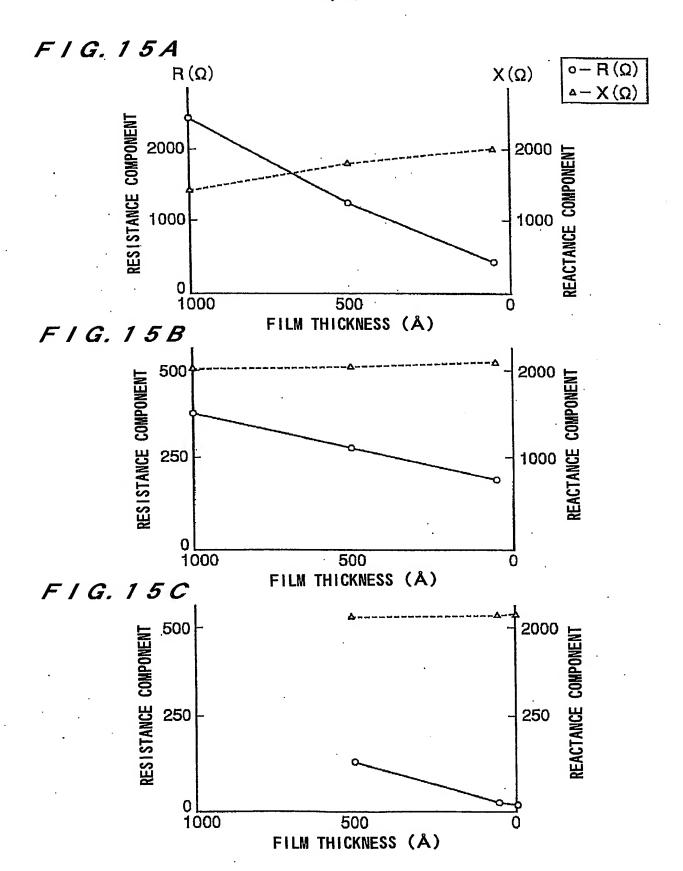

F I G. 16A

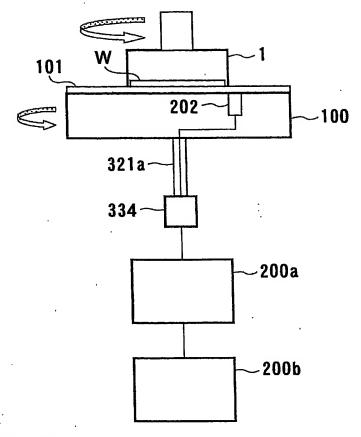



F / G. 16B

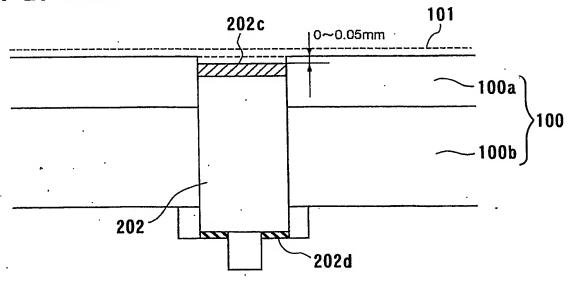


WO 2004/113020 PCT/JP2004/008855

F / G. 17

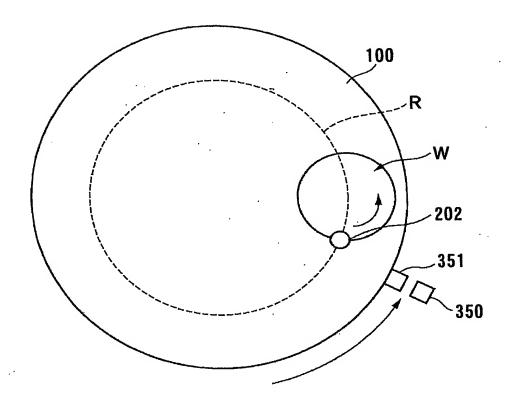


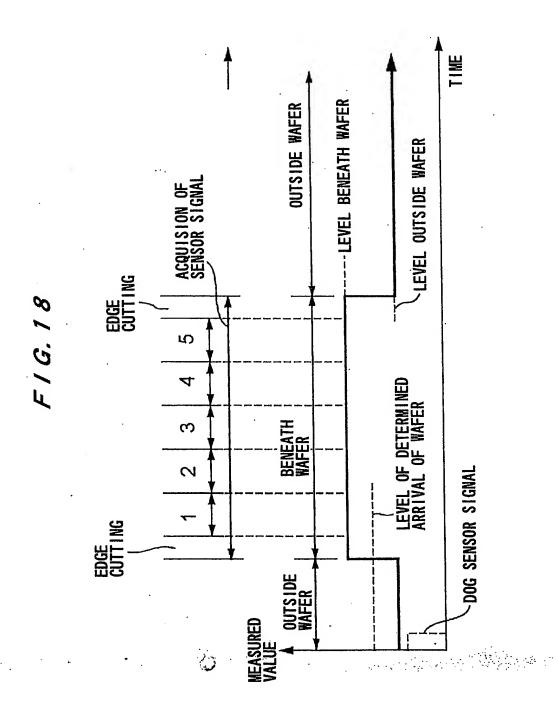

F I G. 19A

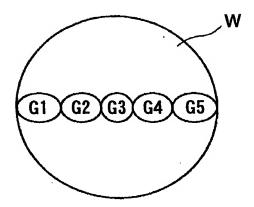


F / G. 19B

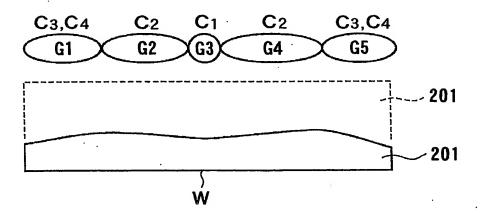



20/23

F I G. 20

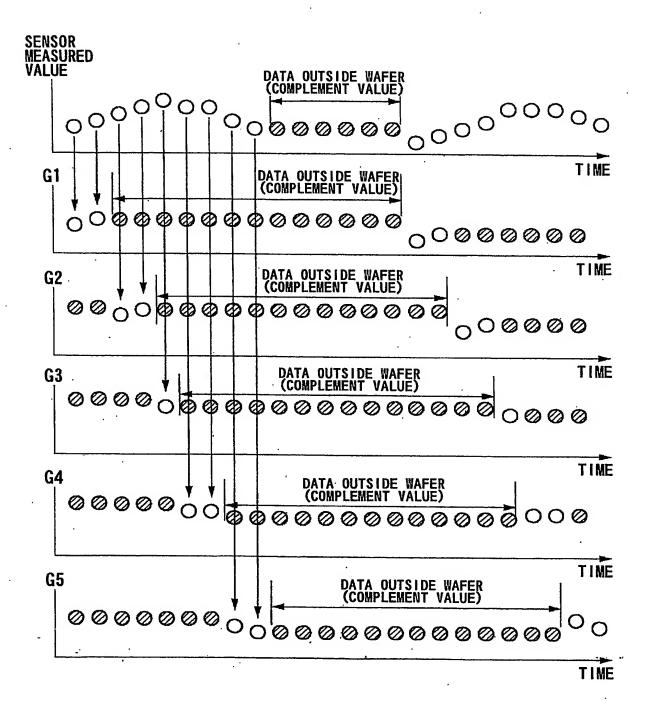


PCT/JP2004/008855

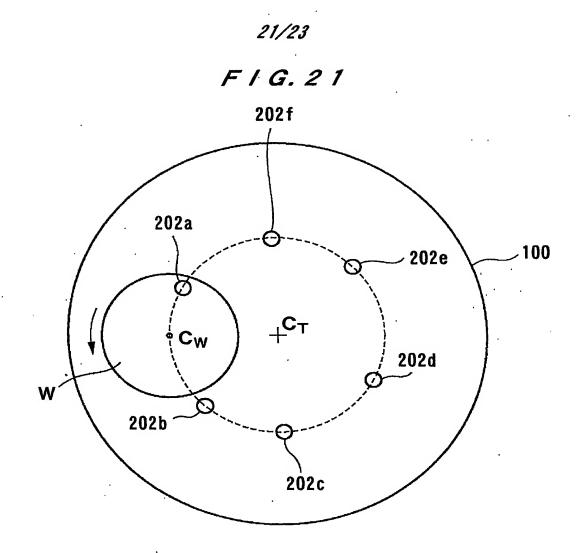

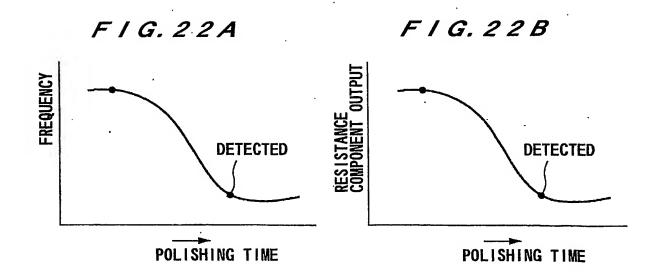

F I G. 23

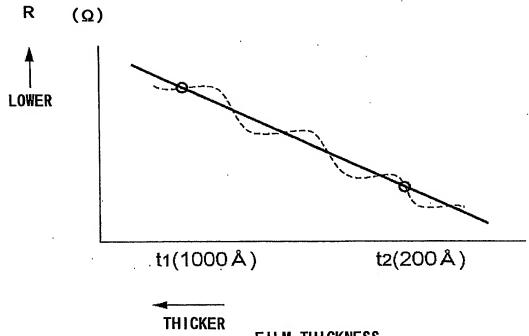

FILM THICKNESS OF ELECTRICALLY CONDUCTIVE FILM

